


# ITS.11204 Concealed Standard Rail

Power  
Adjustable  
EN2-4 by  
Spring



Silver (SE)

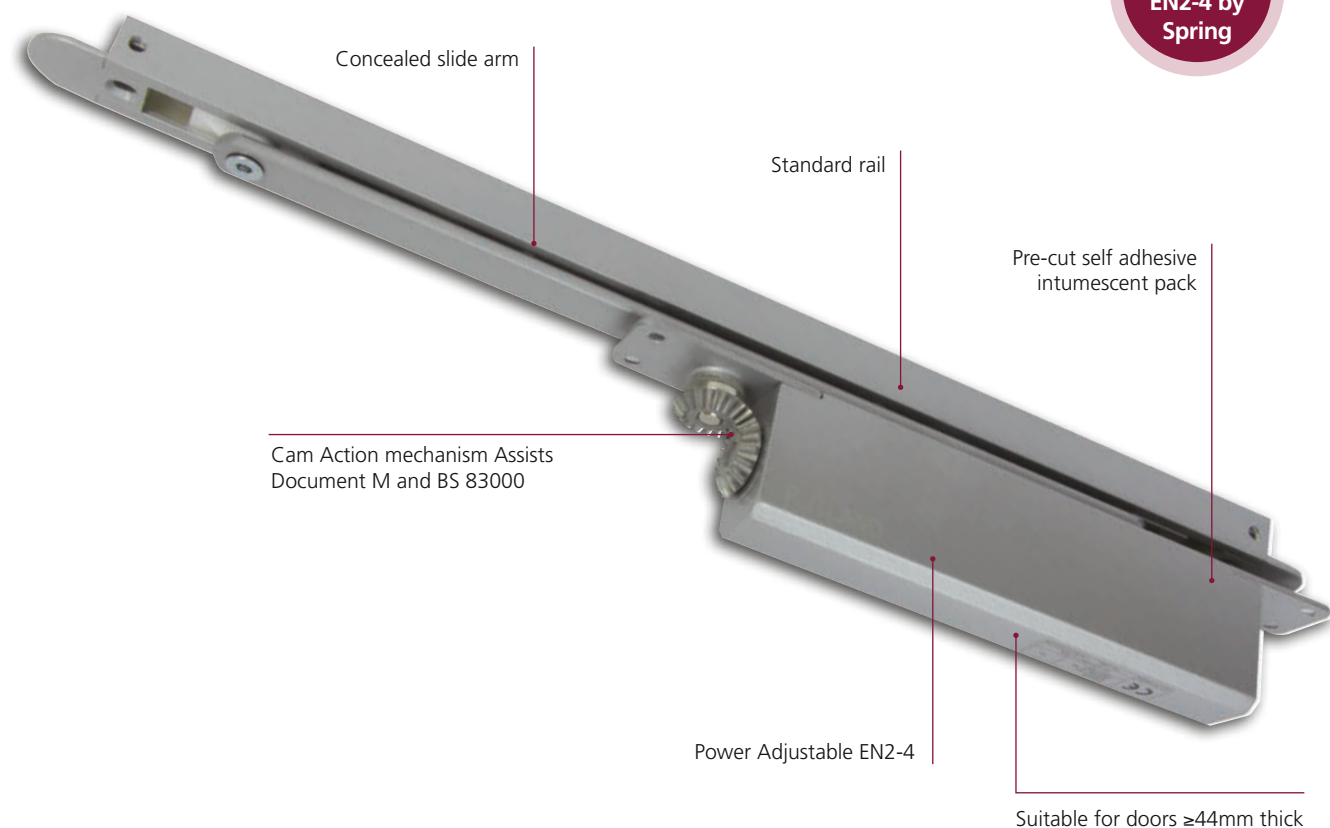

Satin Nickel Plate (SNP)



Polished Nickel Plate (PNP)



Electro Brass (PVD)



Antique Brass (AB)



Black (BK)

## Product Overview

- ✓ Variable power size EN 2-4
- ✓ CE marked
- ✓ Concealed cam and roller mechanism
- ✓ Universal fitting
- ✓ Standard rail
- ✓ Easy to read instructions, saving over 12 minutes fitting time
- ✓ Corrosion Grade 3 – Recommended for internal use



1720

## Specification Overview




Fire Tested  
to EN1634



Max Door Weight  
up to 80kg



Opening Angle  
110°



Max Door Width  
1100mm



Min Door  
Thickness 44mm



Adjustable  
Closing Speed



11204250CP  
R071118



Universal  
Application



Power Size  
EN2-4



Adjustable  
Latch Speed



Guarantee



Min Door  
835mm




Rut Lock



IFCC 1417

All dimensions shown are in mm.

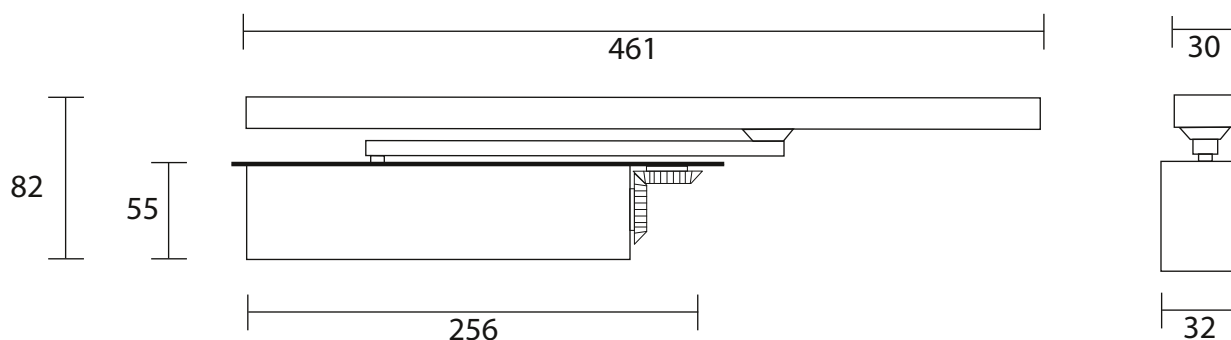

For fitting instructions see website - [www.rutlanduk.co.uk](http://www.rutlanduk.co.uk)

## Technical Information

### BS EN 1154 Classification

ITS.11204 door closers have been independently tested to conform with the EN 1154 performance standard. They are CE marked and classified as follows:

|   |   |   |   |   |   |
|---|---|---|---|---|---|
| 3 | 8 | 2 | 1 | 1 | 3 |
|   |   | 4 |   |   |   |

### BS EN 1634 Fire Test

ITS.11204 closers have been tested to EN 1634 requirements up to 60 minutes– please specify intumescent gasket IP.114. Test certificates are available on request.

### FIRE DOORS

Intumescent **MUST** be used on fire doors – please enquire for latest testing details.

### ITT Timber Leaf & Timber Frame:

May be fitted in previously tested single-acting, latched or unlatched, intumescent sealed timber door and timber frame assemblies.

### IMM & MM Timber Leaf & Timber Frame:

May be fitted in previously tested single-acting steel door assemblies, if required in latched or unlatched un-insulating or insulating steel door leaf and steel frame assemblies.

## Options



- Mechanical hold open slide rail (*Not to be used on fire doors. Not covered by CE*)
- Anti-Ligature
- For uninsulated doors see code in components list for intumescent kit





Student Accommodation, England

# ITS.11204 Components

| Description                                                                                                                                                                            | EN Size | Finish          | Re-order Code | Product Code      | Box Qty |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-----------------|---------------|-------------------|---------|
|  <p>Single Action-ITS.11204 concealed standard rail slide arm door closer</p>                         | 2-4     | Silver          | 11172         | ITS.11204.2.5.SE  | 10      |
|                                                                                                                                                                                        |         | Satin Nickel    | 11173         | ITS.11204.2.5.SNP | 10      |
|                                                                                                                                                                                        |         | Polished Nickel | 11170         | ITS.11204.2.5.PNP | 10      |
|                                                                                                                                                                                        |         | Electro Brass   | 11171         | ITS.11204.2.5.PVD | 10      |
|                                                                                                                                                                                        |         | Antique Brass   | 12026         | ITS.11204.2.5.AB  | 10      |
|                                                                                                                                                                                        |         | Black           | 12199         | ITS.11204.2.5.BK  | 10      |
|  <p>ITS.11204 Mechanism only</p>                                                                      | 2-4     | Silver          | 11165         | ITS.11204         | 10      |
|  <p>ITS.11204 concealed door closer-to-slide arm complete with single action connector bar - CB.5</p> | -       | Silver          | 12001         | SA.2.5.SE         | 25      |
|                                                                                                                                                                                        |         | Satin Nickel    | 12002         | SA.2.5.SNP        | 25      |
|                                                                                                                                                                                        |         | Polished Nickel | 11998         | SA.2.5.PNP        | 25      |
|                                                                                                                                                                                        |         | Electro Brass   | 11999         | SA.2.5.PVD        | 25      |
|  <p>Concealed mounting frame for hollow metal or aluminium door frames</p>                            | -       | Silver          | 12029         | SA.2.MF           | 25      |
|  <p>Cushion stop</p>                                                                                | -       | -               | 11249         | SA.CS             | 50      |
|  <p>Hold open facility</p>                                                                          | -       | -               | 11251         | SA.HO             | 50      |
|  <p>Slide Arm Block</p>                                                                             | -       | -               | 11236         | SA.1.BLOCK        | 1       |
| Standard Rail Intumescent Pack                                                                                                                                                         | -       | -               | 11161         | IP.114            | 100     |
| Anti-Ligature                                                                                                                                                                          | -       | Black           | 12075         | FIX.AL            | -       |

