


# TS FIRETRAK.114 Electromagnetic Slide Arm Closer

Power  
Adjustable  
EN2-4  
by Spring

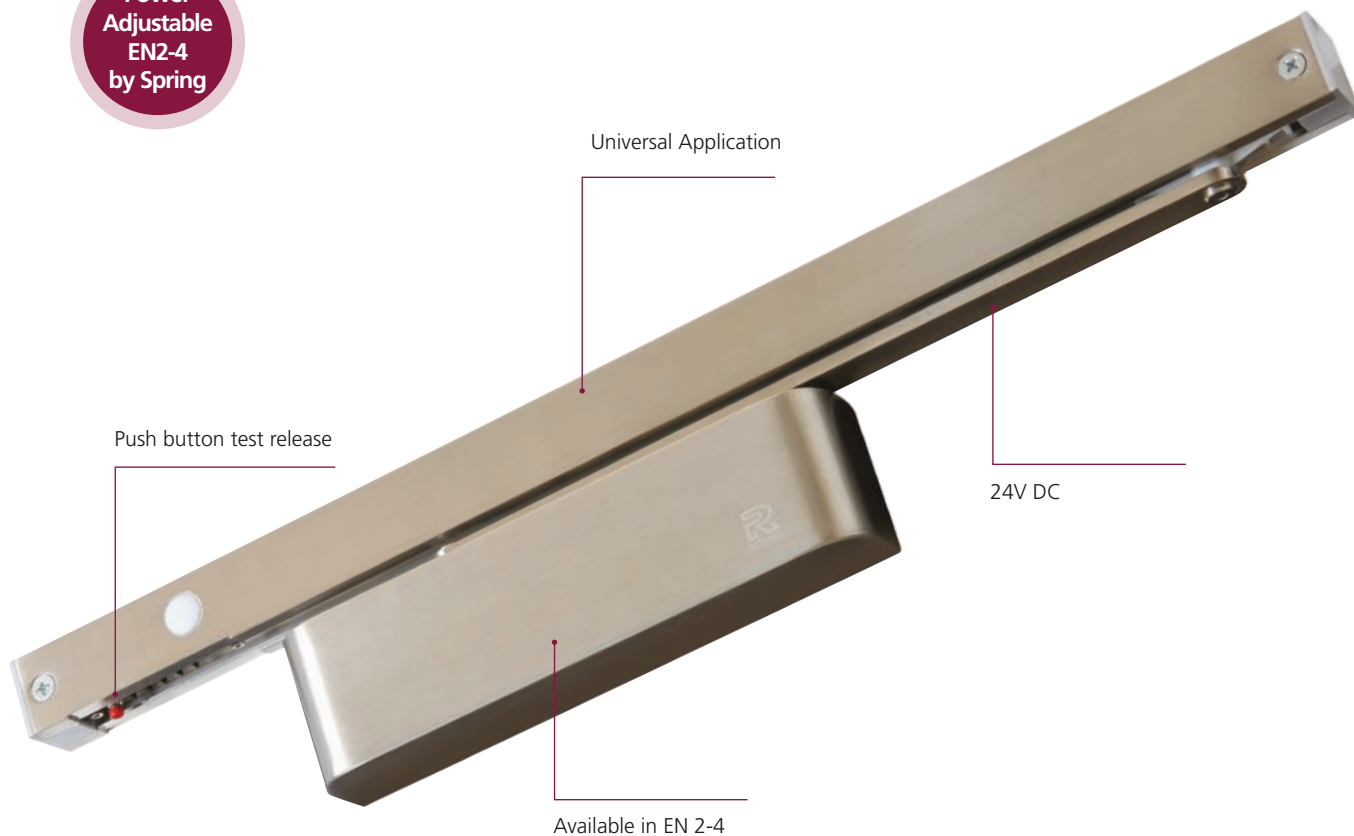

Silver (SE)

Satin Nickel Plate (SNP)

## Product Overview

- ✓ Variable power size EN 2-4
- ✓ CE marked
- ✓ Universal fitting
- ✓ Electromagnet is activated by the fire alarm or over-ridden on the switch
- ✓ Fire tested to EN1634

## Specification Overview




Fire Tested  
to EN1634



Max Door Weight  
EN 2-4 - 80kg



Opening Angle  
130°



Max Door Width  
EN 2-4 - 1100mm



Universal  
Application



Power Size  
EN 2-4



Min Door  
857mm



24V Direct  
Current



Adjustable  
Closing Speed



Adjustable  
Latch Speed




Guarantee



IFCC 1512

All dimensions shown are in mm.

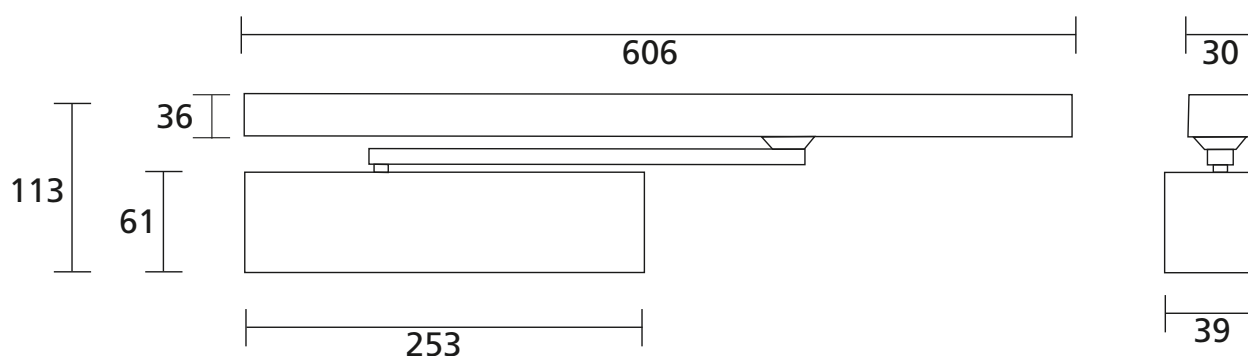

For fitting instructions see website - [www.rutlanduk.co.uk](http://www.rutlanduk.co.uk)

## Technical Information

Volts: 24DC

Amp: 84ma Draw

Watts: 2W

The current 2A 24VDC Power Supply Unit (PSU) we stock has 4 outputs.

### EN 1155 Classification

Tested to EN 1155:1997, 24V DC. Which cover building hardware, specifically electrically powered hold open devices for swing doors.

### BS EN 1634 Fire Test

The TS.FIRETRAK has been fire tested to the BS EN 1634 standard to over 60 minutes.

## Options

- Finishes available: Silver, Satin Nickel
- Power Supply Unit is available - on request
- Anti-Ligature
- For uninsulated doors use IP.FIRETRAK.114SM

| Description                                                                                                              | EN Size | Finish       | Re-order Code | Product Code        |
|--------------------------------------------------------------------------------------------------------------------------|---------|--------------|---------------|---------------------|
|  Electromagnetic slide arm door closer | 2-4     | Silver       | 12446         | TS.FIRETRAK.114.SE  |
|                                                                                                                          |         | Satin Nickel | 12447         | TS.FIRETRAK.114.SNP |
| Anti-Ligature Fixing Bolt for Connector Bar                                                                              | -       | Black        | 12075         | FIX.AL              |
| Intumescent for uninsulated steel doors                                                                                  | -       | Black        | 12462         | IP.FIRETRAK.114SM   |