



Xtratone Addressable Wall Sounder (MKII-AXT/R & MKII-AXT/W)

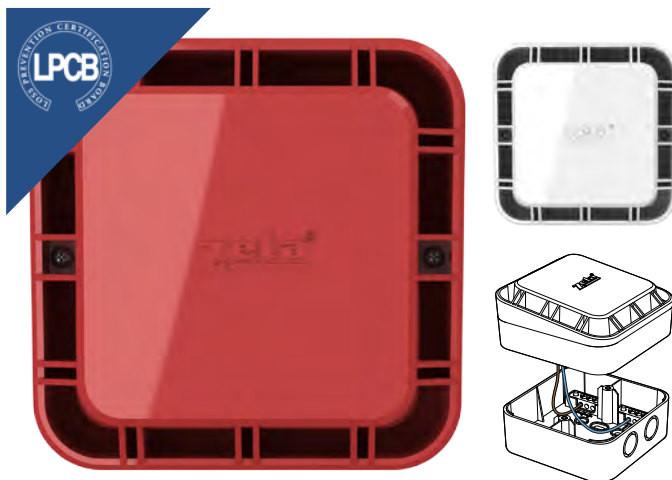

Dimensions & Weight

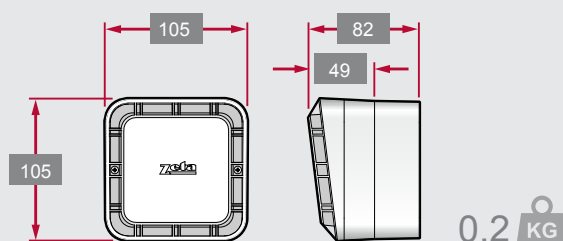

Technical Specification

Model	MKII-AXT/R	MKII-AXT/W
Part Number	42-610	42-611
Colour	Red	White
Operating Voltage	17 – 28V Dc	17 – 28V Dc
Quiescent Current	650mA	
Alarm Current	4.5mA	
Sound Output	*102dB +/- 2dB	
Minimum Continuous Operating Temperature	0°C	
Operating Temperature	-10°C To +55°C	
Max Humidity	95% Rh Non Condensing	
IP Rating	IP 21C	
Size mm (with back box)	105 x 105 x 49mm (105 X 105 X 82mm)	
Weight	200g	

* This applies to 'TONE 0' 800Hz and 970Hz, 500ms each

Description

The Xtratone sounders are small, high output addressable devices which are designed to meet EN54 part 3.

The device is a compact unit that fits a standard European back box and can be either surface or semi-flush mounted.

The Xtratone sounder has been designed so that field cables can be terminated in the back box as a first fix.

Features

- Complies to EN54 parts 3
- 102dB @ 1m sound output
- 16 tones can be selected from control panel
- Hard addressed via 8 way dip-switch OR
- Soft addressed via MKII Handheld Programmer
- Flush or surface fixing
- Housed in UL V0 flame retardant ABS
- 4 x 20mm cable entries (2 top, 2 bottom)
- First fix, wire to back box technology

First Fix

