

NC-DPH-W

Conventional heat detector (white)



Details

- Self-diagnostic
- Local test activation with reed switch
- All round LED visibility (360° viewing angle) avoids time spent on specific detector orientation
- Configurable polling LED support
- Remote indicator output
- 3 Programmable operating levels (A1R, A2S and BS)

NC-DPH-W

Conventional heat detector (white)

Technical specifications

General

Status indication	Red LED
User interface	Via LED - polling, fault, contamination and alarm
Compatibility	GST100A Series conventional CIEs as well as GST I-9319 Zone Monitor
Reset voltage	< 1 VDC
Reset time	<10 s
Alarm levels	3
Connectivity	Zone connection - 2-core (polarity sensitive), RI connection - 2-core (polarity sensitive)

Electrical

Operating voltage	9.5 to 28 VDC (24 VDC typical)
Current consumption	<60 µA (Quiescent) ≤55 mA (Alarm)
Cable specification	>1.0 mm ²
No. of cable cores	2
Terminals	4

Detection

Detection principle	Heat
Sensitivity	Programmable
Zone length	Panel dependent

Output

Remote alarm output	1
---------------------	---

Physical

Physical dimensions	54.5 mm (including base) x 100 mm Ø
Net weight	±110 g
Colour	White (RAL 9016)
Mounting type	Ceiling mount
Material (body)	ABS

Environmental


Vandal proof	No
Operating temperature	-10 to +65°C
Relative humidity	0 to 95% noncondensing
Environment	Indoor
IP rating	IP2x

Regulatory

Compliance	CE, WEEE
Certification	EN54-5
Standards	LPCB

Compatible products

Category	Reference	Description
Detection device	NC-DB-W	
Detection device	NC-DB2R-W	
Detection device	NC-DBD-W	
Detection device	NC-DBR-W	
Notification device	PA25/3L	

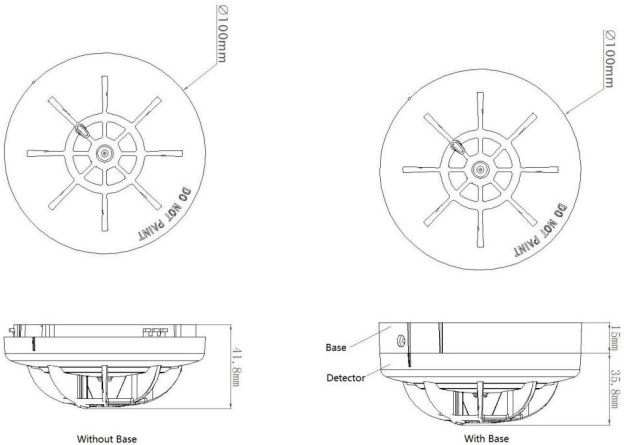

As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit uk.firesecurityproducts.com online or contact your sales representative.