


SERAGE

QUALITY RELIABILITY VISION



16 CHANNEL NVR

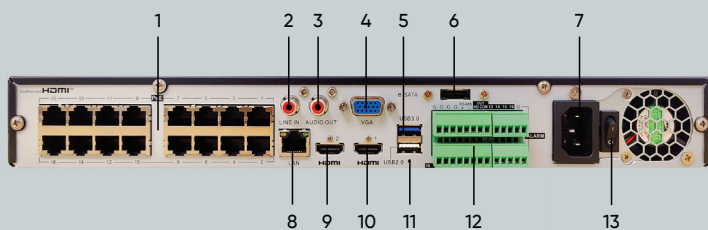

No.	Description	No.	Description
1	PoE INPUTS	8	LAN NETWORK
2	LINE IN	9	HDMI 2 (SPOT)
3	AUDIO OUT	10	HDMI 1 (MAIN)
4	VGA OUTPUT	11	RESET BUTTON (10SEC)
5	USB PORT 2.0/3.0	12	ALARMS IN/OUT
6	ESATA	13	POWER SWITCH
7	POWER SUPPLY		


AI FEATURES:




License Plate Detection




Crowd Density



People counting



Pedestrian & Vehicle Detection



APP Notifications



Face Recognition



NDAA (National Defense Authorization Act) compliant, refers to products that are "safe to use" by government agencies and enterprises.

SR9016NP/2

Resolution 8MP, 5MP, 3MP, 2MP (1080P), 1.3MP (960P)
1.0MP (720P)

Inputs 256 Mbps
Out 128 Mbps

Audio: G.711A;G.711U
Video: H.264/H.264+/H.265/H.265+
4K: 60fps
4MP: 120fps
2MP: 240fps

Compression

Frame rate

AI

Event

YES
MD (Sensitivity Level 1~8)
Video loss
Beep, Email,
Push notification to Mobile APP

Playback function

Playback

Fisheye

Local

WEB

Fast forward/backward (2x, 4x, 8x,16x)
Slow forward (1/2x, 1/4x, 1/8x,1/16x)
Max 16CH playback
Use WEB CMS,device does not support
UI5.0
IE10/11
Safari V12.1 above
Firefox V.52 above
Google chrome V.57 above
Edge V.79 above

Mobile App

Push Notification

Password Reset

VGA

HDMI

HDMI 2

POE

Ethernet

USB

Audio out

E-sata

HDD

Line in

RS485

Alarm Input/out

OSD Language

Dimension (WxDxH)

Rack Mount

Input Voltage/Current

Power consumption

(excluding hard disk)

Operating Temperature

Humidity

SERAGE

YES

Factory Reset Button: Press 10 seconds

1 (1024*768, 1280*720, 1280*1024
1440*900, 1920*1080)

(1024*768, 1280*720, 1280*1024, 1440*900
1920*1080, 3840*2160/EDID)

2 (1024*768, 1280*720, 1280*1024
1440*900, 1920*1080)

Async output

16*RJ45 802.3at/af

1 RJ45 100/1000 Base-T

USB2.0 * 1 (front)

USB3.0 *1 + USB2.0 * 1 (rear)

1

1

2 SATA, each HDD up to 8TB

1

1

16 in /1 out

English/French/Spanish/Portuguese/German
Italian/Greek/Danish/Finnish/Russia/Hebrew
Turkish/Bulgarian/Arabic/Korean/Japanese
Thai/Hindi/Romanian/Dutch/Polish

380x340x50mm

1U

ATX280W

12W

-10°C~+50°C (14°F ~ 122°F)
Less than 90%RH"