


SERAGE

QUALITY RELIABILITY VISION



64 CHANNEL NVR

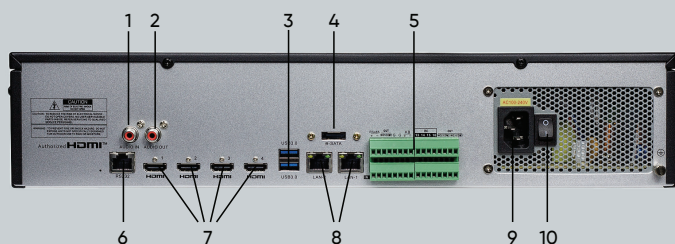

No.	Description	No.	Description
1	LINE IN	6	RS232
2	AUDIO OUT	7	HDMI 1 (main) 3 spots
3	USB PORT 3.0 x 2	8	LAN NETWORK
4	ESATA	9	POWER SUPPLY
5	ALARMS IN/OUT	10	POWER SWITCH


AI FEATURES:



License Plate Detection




Crowd Density



People counting



Pedestrian & Vehicle Detection



APP Notifications



Face Recognition



NDA (National Defense Authorization Act) compliant, refers to products that are "safe to use" by government agencies and enterprises.

SR9064N

Resolution	8MP,5MP, 3MP, 2MP (1080P) 1.3MP (960P), 1.0MP (720P)
Inputs	640 Mbps
Out	640 Mbps
SOC	RK3588
Flash	NAND128MB
DDR	LPDDR4 2666 2*16G
Compression	Audio: G.711a Video: H.264/H.265/H.264+/H.265+
Frame rate	4K: 240fps 4MP: 480fps 2MP: 960fps
Event	MD (Sensitivity Level 1~8) Video loss Beep, Email, Push notification to Mobile APP
Playback function	Fast forward / backward (2x, 4x, 8x,16x) Slow forward (1/2x, 1/4x, 1/8x,1/16x)
Fisheye	Support
Local	UI5.0
WEB	IE10/11 Safari V12.1 above Firefox V.52 above Google chrome V.57 above Edge V.79 above
Mobile App	SERAGE
Push Notification	YES
AI	Face Detection Pedestrian Detection Vehicle Detection People Counting Heat Map Crowd Density Detection Perimeter Intrusion Detection Line Crossing Detection Queue Length Detection License Plate Detection Rare Sound Detection
Password Reset	Factory Reset Button: Press 10 seconds
HDMI	4 HDMI (up to 4K), 1 VGA HDMI1 (main out) HDMI2 (spot out) up to 4K up to 36 cameras HDMI3 (spot out) up to 4K up to 36 cameras HDMI4 (spot out) up to 1080p up to 16 cameras
Ethernet	2 RJ45 1000 Base-T
USB	USB2.0*1(front) USB3.0*2(rear)
Audio out	1
E-sata	1
HDD	8 SATA HDD, up to 12TB Each
RAID	0, 1, 3, 5, 6, 10, JBOD, CLONE for reliable data storage & data loss
Line in	1
RS232	1*RJ45
RS485	1
Alarm Input/out	16in /4out
OSD Language	English/French/Spanish/Portuguese German/Italian/Greek/Danish/Finnish/Russia Hebrew/Turkish/Bulgarian/Arabic/Korean Japanese/Thai/Hindi/Romanian/Dutch/Polish
Dimension (WxDxH)	440x460x89mm
Rack Mount	ATX 250W
Input Voltage/Current	8W
Power consumption	(excluding hard disk)
Operating Temperature	-10°C~+50°C (14°F ~ 122°F)
Humidity	Less than 90%RH"

*Specifications subject to change without further notice