

CHANNEL
Smarter Safety

ALPINE



LED emergency exit signage
from Channel Safety Systems




LED Emergency Exit Sign

The Alpine utilises LED technology for low cost, high output, emergency illumination.

Features

- Low running cost (1.9W LED equivalent to 8W fluorescent)
- 27x 0.07W LEDs
- Long life LED technology
- Lightweight & easy to install
- Maintained or non-maintained 3 hour emergency backup
- Prismatic diffuser on underside to illuminate door exit
- Incorporates LiFePO4 3.2V 1000mAh
- Low environmental impact
- Minimal maintenance
- Additional pictograms available to fit in with your existing scheme
- Meets BS EN 60598-2-22 and other relevant standards
- Optional remote control facilitates easy testing

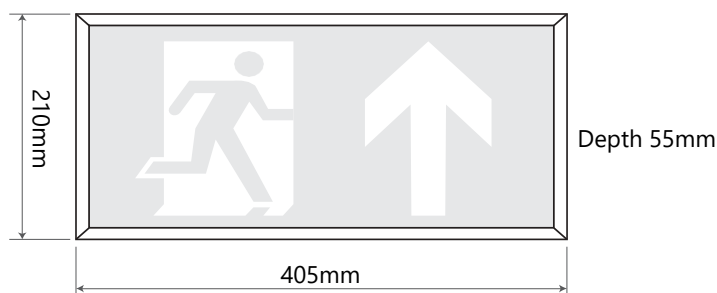

Note: Image not to scale and for pictorial reference only

Optional Remote Control

- Press once for 5 second monthly test
- Press twice for 3 hour yearly test
- LED confirms pass/fail status
- No need to remove/restore power

SPECIFICATIONS

Light Source	27 x 0.07W LED (Total 1.9W)
IP Rating	IP50
Emergency Duration	3 hours (minimum)
Mains Voltage	230V 50Hz $\pm$ 10%
Mains Current (max)	150mA (max) 35mA quiescent (3W)
Recharge Period	Less than 24 hours
Charge Indicator	Integral green LED
Changeover Voltage	As per the requirements of BS EN 60598-2-22
Temperature Range	5°C to 40°C
Weight	800g
Battery	LiFePO4 3.2V 1000mAh
Material & Finish	Polycarbonate construction, white finish



www.channelsafety.co.uk

Tel: 0845 884 7000

Email: sales@channelsafety.co.uk

PRODUCT CODE

E/AL/M3/LED/LI
E/PIC/AL/AD
E/PIC/AL/AL
E/PIC/AL/AR
E/PIC/AL/AU
E/EM/RC

DESCRIPTION

Alpine LED exit sign complete with legend arrow up
Alpine pictogram legend arrow down
Alpine pictogram legend arrow left
Alpine pictogram legend arrow right
Alpine pictogram legend arrow up
Alpine Remote Control

Errors & omissions excepted. Specification is subject to change without notice.