

CHANNEL
Smarter Safety

GU32



LED Twin Spot
from Channel Safety Systems




LED Emergency Twin Spot

This Non-Maintained IP20 LED Twin Spot for interior installations provides up to three hours of emergency lighting thanks to the LiFePO4 3.2V 5500mAh battery. The polycarbonate body, in a white finish provides the ideal choice for warehouses, factories, open areas & corridors.

Features

- Power consumption: 3.2W
- Uses 50% power than that of a Tungsten halogen
- Lumen output: 385lm (emergency mode)
- Material: Polycarbonate lamps & lenses.
- IP Rating: IP20 non-maintained mode only
- Compliance: BS EN 60598-2-22 and other relevant standards.
- Voltage: 240V, Mains voltage
- Emergency operation: 3hrs
- Battery: LiFePO4 3.2V 5500mAh battery
- Health indicator feature
- Carry handle for portability
- Ambient temperature: 0°C to 40°C

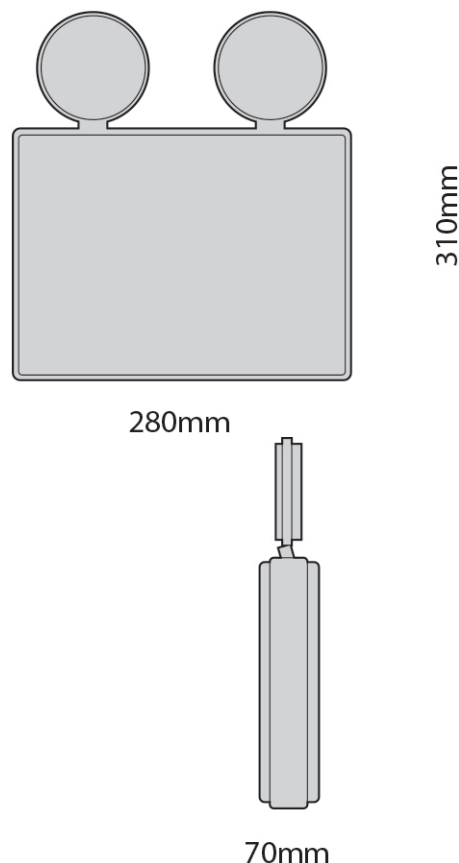

PRODUCT CODE	DESCRIPTION
E/GU32	GU32 Twin LED 3 Hour Non-Maintained emergency light

PHOTOMETRIC SPACING DATA (1 lux)

PHOTOMETRIC SPACING DATA (1 lux)		
		
Mounting Height	Back-Side-Front	
2.5m	3.0m	8.5m
4m	3.5m	10.5m
6m	4.0	11.5m

SPECIFICATIONS

Light Source	385 lumen output (emergency mode)
IP Rating	IP20
Emergency Duration	3 hours (minimum)
Mains Voltage	230V 50Hz $\pm$ 10%
Mains Current	3.2 W (emergency mode)
Mounting	In any orientation
Recharge Periods	Less than 24 hour
Charge Indicator	Integral green LED
Changeover Voltage	As per the requirements of BS EN 60598-2-22
Temperature Range	0°C to 40°C
Weight	IP20 – 1.2kg
Battery	LiFePO4 3.2V 5500mAh



www.channelsafety.co.uk

Tel: 0845 884 7000

Email: sales@channelsafety.co.uk

Deta Electrical Company Ltd.

UK: Panattoni Park Luton Road Chilton Bedfordshire LU4 9TT UK
EU: Unit 16 Ashbourne Industrial Estate Ashbourne Co. Meath A84 W972
sales@deta.co.uk