

The Identifire Pro VAD is a low profile EN54:23 (approved by UL) 32 tone VAD with bright VAD (wall and ceiling variants)


The Identifire Pro range of products compliments the existing Identifire family and can be pad printed with your logo or unique top text.

Available in red and white flash in an array of different mounting options including an IP67 Weatherproof base.

Specification

Operating Voltage	18-30V dc (EN54:23 @ 20.4-28Vdc)
Current Consumption (VAD)	35mA (1Hz)/26mA (0.5Hz)
VAD Rating (@1 Hz)	Wall = Red - W-X.X-X/ White = W-X.X-X Ceiling = Red - C-X.X-X/ White = C-X.X-X
Weight	182g (Flush)/ 209g (Pattress)/ 284g (W/P)
Housing Material	Fire rated ABS
Operating Temperature	-10°C to +50°C
Body Colour	Red/White
Lens Colour	Red/White
Environmental Category	Type A (Indoor)/Type B (IP67)

PART NUMBERS

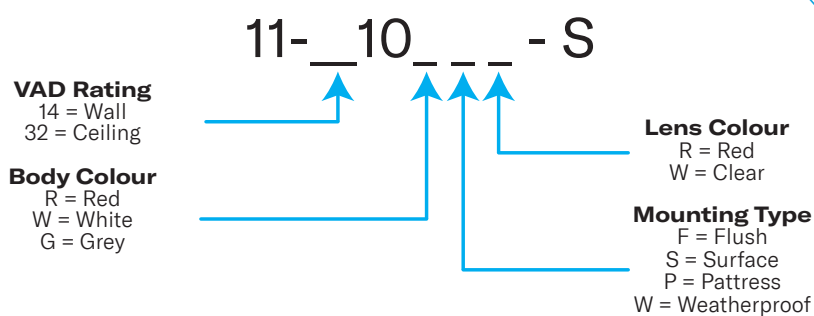

Example Part No: 11-1710RWW-S
Identifire Pro VAD Wall, Red, Weatherproof, Clear

LENS OPTIONS



MOUNTING OPTIONS



Pattress



Surface



Weatherproof



IDENTIFIRE | PRO


Features

- / EN54-23 tested and fully approved in accordance with CPR
- / Flush, Surface, Pattress and Weatherproof options
- / Low current consumption
- / 1Hz/0.5Hz selectable via jumper
- / Wall and Ceiling Mounted

Approvals




**MADE IN THE UK
BY VIMPEX**

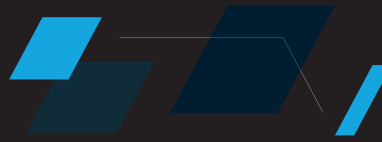


TECHNICAL DRAWING

Front Plate

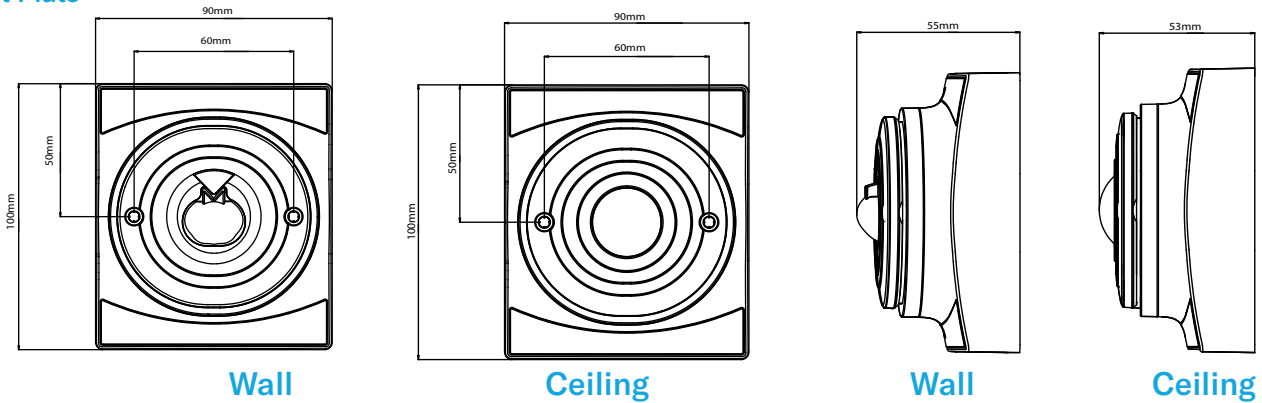

Pattness

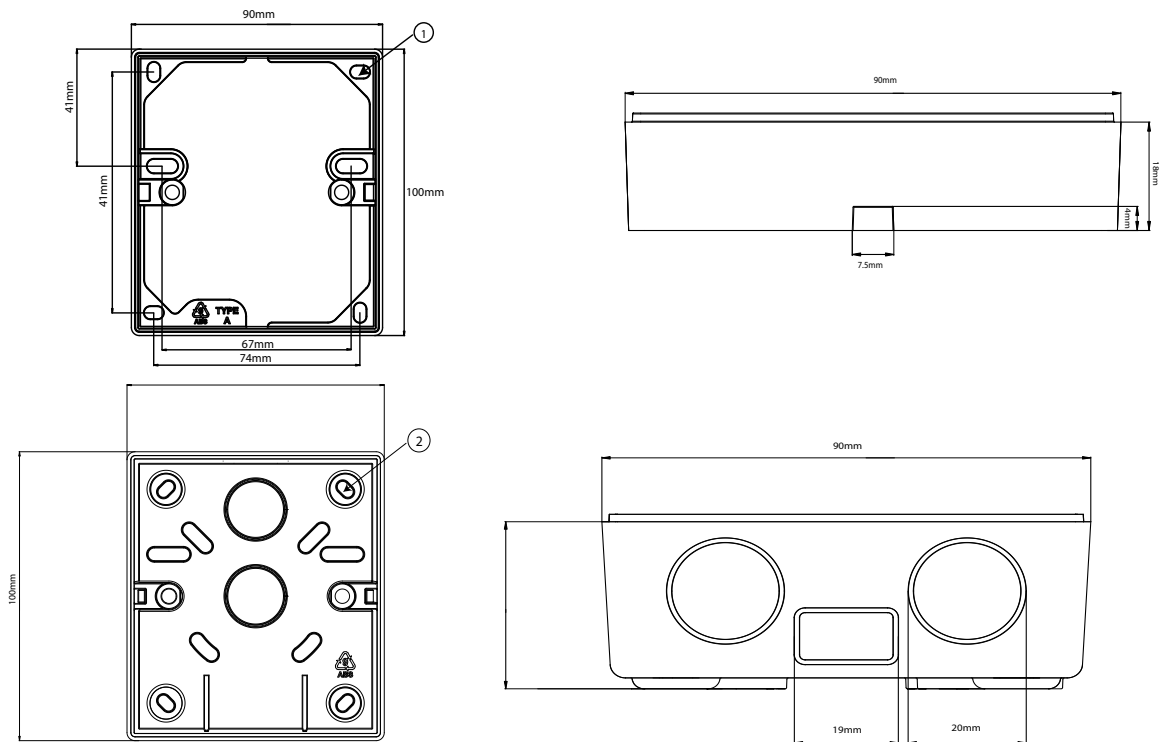

Weatherproof

