



## SRAEYE AI VIDEO DOORBELL

### Camera

Image Sensor	1/2.7" Progressive Scan CMOS
Image Size	1944 x 2592
Electronic Shutter	1/5s ~ 1/200000s
IRIS Type	Fixed IRIS
MIN. Illumination	0 lux (white LED ON)
Lens	2.1mm@F2.0; Vertical FOV: 132°, Horizontal FOV: 96°, Diagonal FOV: 163°
Lens Mount	M8
WDR	Yes
BLC	Yes
HLC	Yes

### Image

Video Compression	H.265/H.264/MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/ High Profile
Bit rate Type	VBR/CBR
Bit Rate	256Kbps ~ 6Mbps
Resolution	1944 x 2592, 1800 x 2400, 960 x 1280
Main Stream	50/60Hz: 20fps @ 1944 x 2592, 1800 x 2400 (Default)
Sub Stream	50/60Hz: 20fps @ 960 x 1280
Image Setting	Saturation, hue, brightness, contrast, sharpness, 3D NR
Audio Compression	G711A/U

5MP  
IP



## KEY FEATURES

### HUMAN DETECTION



### PACKAGE DETECTION



## WHERE

Install at your front door, apartment entrance, or office entry.

## WHY

Smart AI features like human, loitering, and package detection. No subscriptions needed, full control with local storage.

### Interfaces

Network	100M RJ45
Audio	Built-in MIC×1, built-in speaker×1
Reset Button	Yes
Storage	1CH built-in micro SD card slot, up to 512GB
WiFi	Supports 2.4G/5G WiFi
Doorbell Button	Yes
Indicator	Yes

### Function

Remote Monitoring	Web client/CMS remote control/Mobile App
Online Connection	Supports simultaneous monitoring for up to 5 users Supports multi-stream real-time transmission
Network Protocol	UDP, IPv4, DHCP, NTP, RTSP, DDNS, SMTP, UPnP, HTTPS, HTTP
Interface Protocol	ONVIF
Storage	Micro SD card storage
Intelligent Analytics	Human Detection, Package Detection, Loitering Detection
General Function	Video mask, Motion 1m
White Light Distance	3m
IR Light Distance	IP65
Ingress Protection	


### Others

Power	AC/DC 16–24V
PoE Power Supply	Yes
Power Consumption	Max. 9.84W
Working Environment	-25°C ~ 55°C, Humidity: less than 90% (non-condensing)
Dimensions (mm)	46×46×30mm (5.75"×1.81"×1.18")
Weight (net)	115.3g
Installation	Wall mounting (Mounting Bracket, Angled Bracket)


### Wireless Chime

Input	AC 100~240 V; 50~60 Hz
Transmission Mode	RF 433 Mhz
Button	Setting up/Selecting ringtones/Adjusting volume
Dimensions	106.5x53.5x38.7mm(4.19"x2.10"x1.52")

### Dimensions

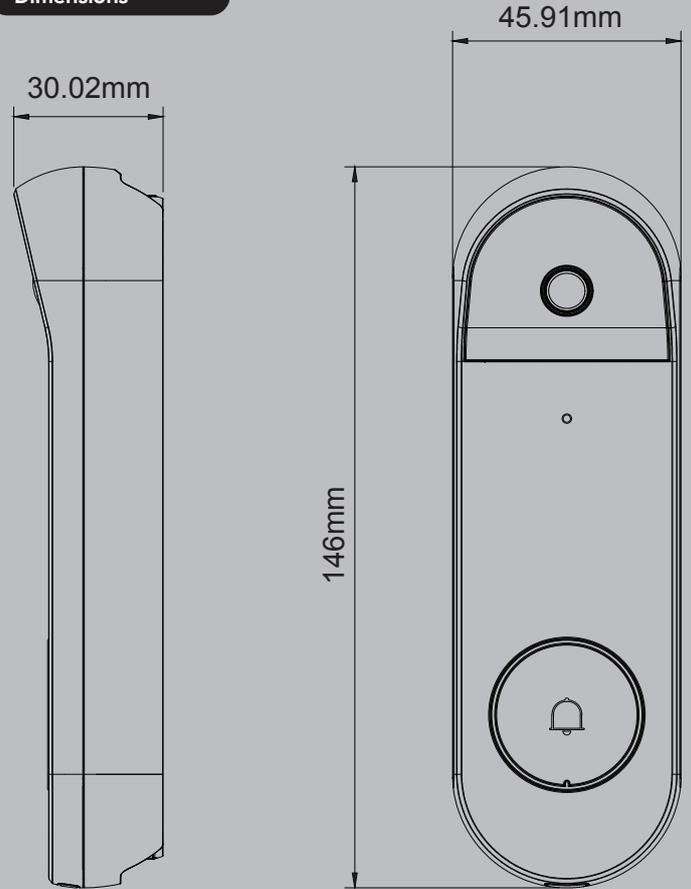

### ACCESSORIES (INCLUDED)



DIGITAL CHIME



CHIME KIT



MOUNTING BRACKET



VERTICAL WEDGE



HORIZONTAL WEDGE