

Ceiling Pull Cord

S1600-R, S1600-O

Non-latching ceiling pull cord with re-assurance LED with 2.5m long cord. These units have voltage free SPCO contacts. The LED incorporates a current limit resistor for use on 12vdc.


Red ceiling pull cords are supplied as standard in all of our Aidalarm Disabled toilet alarm kits. If you are installing a ceiling pull cord into a disabled toilet it should be Red.

Please remember that for nurse call pulls, to comply with legislation you must have 1 bangle 100mm from the floor and another bangle 800mm - 1000mm from the floor.

It is considered against best practise to install a non anti ligature pull cord into a mental health unit due to the risk it poses. If you require Anti-ligature pull cords please ask for information on our S1600AL range.

Specification	S1600-R & S1600-O
Led Current	20mA
Switch Contacts	SPCO 5A @ 125/250vac
Visual Indication	Red LED
Integral Sounder Level	N/A
Tamper	N/A
Material	ABS/Nylon
Dimensions	Ø86 x 31 mm
Weight	0.64kg
IP Rating	N/A
Approvals	UKCA and CE marked, ROHS compliant

Dimensions (mm)

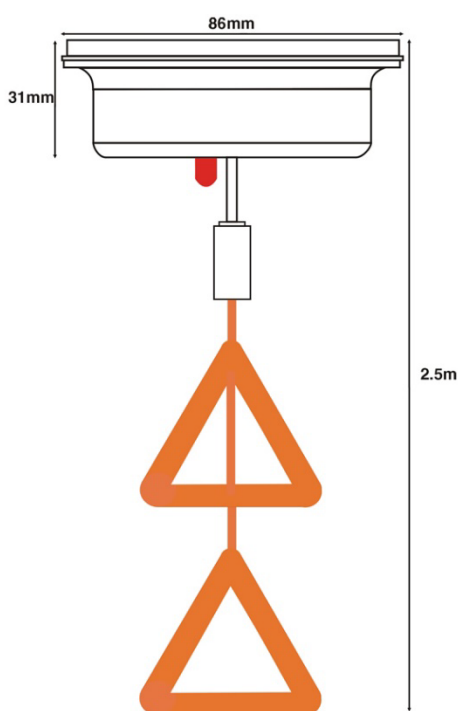

Benefits and Features

- Re-Assurance LED
- Current limit resistor
- Single Pole
- 2.5m Cord Red or Orange
- Non-latching Momentary switch
- Replacement cords available

Inside the box

