

**TITLE:**

Alarm Type 1 Copper LSZH

CODE:


SFX/8C-TY1-LSZH-D-WHT-100

DESCRIPTION:

100m 8 Core Type 1 Alarm White LSZH

SUPPLIED AS:

Reel of 100m

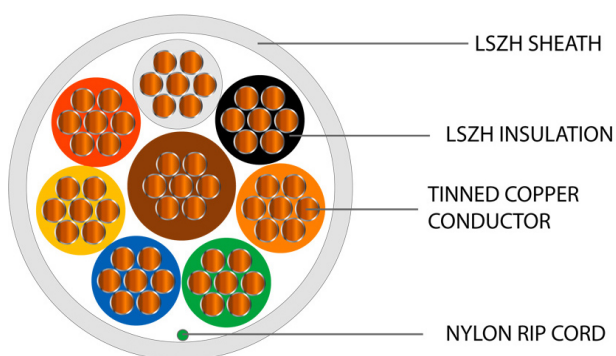



Product Specification

Cable Construction

Cable Construction	8 Cores
CPR	Dca -s2 -a1 -d1
Conductor	Tinned Copper
Conductor Diameter (mm)	0.19 ±0.008 x 7
Overall Diameter (mm)	4.20 ±0.200

Insulation

Insulation	LSZH
Insulation Colour	Red, Black, Blue, Yellow, Green, White, Orange, Brown
Insulation Resistance @20°C	>200 MO/km
Insulation Thickness (mm)	0.21

Outer/Jacket Specification

Jacket	LSZH
Overall Colour	White
Overall Diameter (mm)	4.20 ±0.200
Jacket Colour	White RAL 9003
Jacket Thickness (mm)	0.5
Nylon Rip-Cord	Green 210D

Electrical Characteristics

Insulation Resistance @20°C	>200 MO/km
Max Conductor DC resistance @ 20°C	100O/km
Rated Temperature (°C)	-40°C to 70°C
Rated Voltage (V)	30V





ALARM CABLE



MORE INFORMATION:

Sorry, no more information is available for this product

Alarm cable



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

FLAME-FLEX

Drum-Roll

LUCKINS

epim
putting data first

EDS ELECTRICAL
DISTRIBUTORS'
ASSOCIATION

BSI
NICEIC

KNX
MEMBER

cdi
Cable Design Institute

CPR
Construction Products Regulation

UK
CA