

IP66 Weatherproof Call Button

ViAC-CLP-66



The ViAC-CLP-66 weatherproof call button is fully compatible with the Lexicomm EVC range of equipment and the standalone AssistCall range.

- IP66 weatherproof enclosure
- Ideal for showers/wet areas
- Stainless fascia
- Polycarbonate back box
- Flush or surface mounting
- BS 8300-2:2018 “Acknowledge” feature

Overview

The ViAC-CLP-66 is used to activate the alarm, the call button is recommended for showers and other wet areas where a standard pull cord may be unsuitable.

The call button is finished in brushed stainless steel with a blue indicator for the visual alarm.

Operation

The button is a momentary sprung switch which illuminates with a blue indicator to confirm operation.

There is a maximum number of 6 call buttons on a single line, with the last one operated registering.

Mounting Information

It should be mounted at between 800mm to 1000mm with a lower call button mounted at 100mm from the floor.

There are 5 x 20mm cable entries provided, at top, bottom and side entry, cable entry for the rear via cut-out is also provided. See drawings overleaf for full details.

Wiring Information

For simplicity, all wiring is a standard two core cable, the wiring order of the devices is not fixed and therefore can be wired in any order to give total flexibility.

IP66 Weatherproof Call Button


ViAC-CLP-66

Technical Specification


Details		ViAC-CLP-66
Physical		
Height	100mm	
Width	100mm	
Depth	60mm	
Weight	250g	
Material	Stainless Steel/ Tough Polycarbonate	
Finish	Brushed	
Part Numbers		
Call Plate	ViAC-CLP-66	
Recommended Cables		
Type	Cores	Distance from panel/controller
PVC or fire rated*	2 core 1mm	500m
Cat5/6	1 x pair 0.22mm	50m
Standards Compliance		
EMC	EN 55035:2017+A11:2020 EN 55032:2015+A1:2020	
LVD	EN IEC62368-1:2020 + A11:2020	
Product Family	BS 5839-9:2021 BS 8300-2:2018	

*If connected to a Refuge Point.

Mounting Box Detail

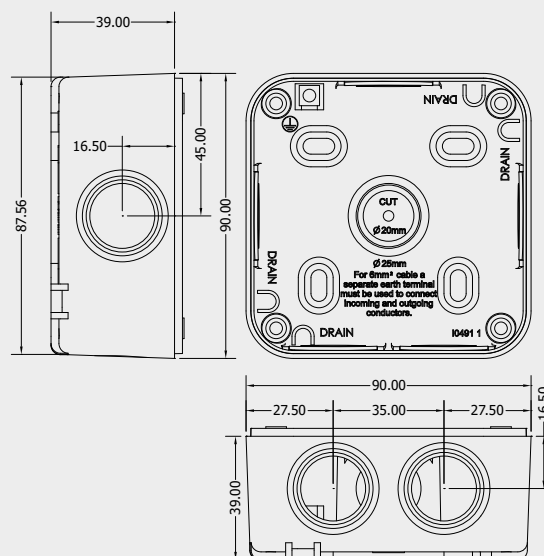

ISO View

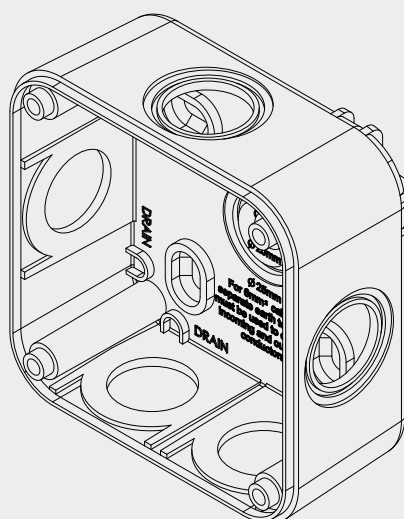

Document reference number: DViACCLW0001-03