



SERAGE

QUALITY RELIABILITY VISION

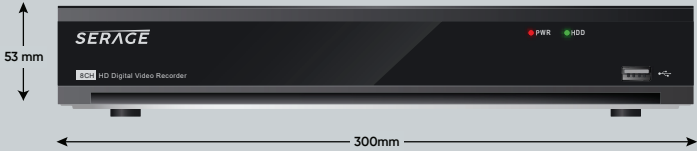

8 CHANNEL DVR

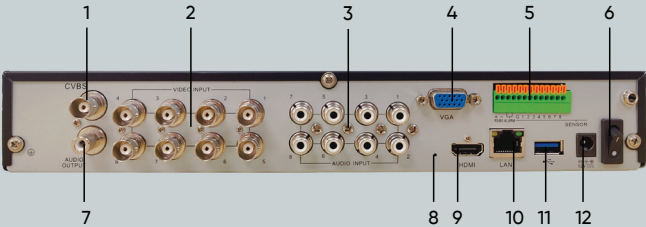

No.	Description	No.	Description
1	CVBS OUTPUT (SPOT)	7	AUDIO OUTPUT
2	CAMERA INPUT (BNC)	8	RESET BUTTON (10SEC)
3	AUDIO IN	9	HDMI OUTPUT (MAIN)
4	VGA OUTPUT (MAIN)	10	LAN NETWORK
5	ALARM IN/OUT	11	USB PORT
6	POWER SWITCH	12	12V DC POWER SUPPLY

KEY FEATURES

- 8CH Universal
- Recording at up to 4K, 7 fps/ch
- Supports 8+ TVI/AHD/CVI/Analogue + 4 IP – A total of 12 Cameras
- 8CH synchronous playback
- 8CH Audio input, 1CH output
- HDMI, VGA & BNC CVBS output
- IP Recording Bandwidth: 32Mbps ~96Mbps
- Supports IOS & Android, Mobile/Tablets Free Application
- 1 SATA HDD, up to 8TB



NDA (National Defense Authorization Act) compliant, refers to products that are "safe to use" by government agencies and enterprises.

SR5008D

Analog video-input	8CH inputs
IP Video Input	4ch, (only IP up to 12ch)
IP Cam Inputs	24Mbps ~72Mbps
	Decrease one Analog channel can increase 6Mbps
	Analog channel and digital channel can be converted
out	72Mbps
Composite Video Input	Up to 12ch (Analog video + IP video)
Compression	Audio: G.711a
	Video: H.264/H.265
Display resolution	Analog: 8MP (15fps)
	5MP (20fps)
	4MP/1080P/720P/960H (30fps)
	IP: 4K/4MP/1080P/720P
	Single IP channel preview up to 4K 30 fps
Speed	Main-stream
	Analog: 8MP:7fps(each ch)
	5MP: 12fps(each ch)
	4MP: 15fps(each ch)
	1080P: PAL:25fps(each ch)/NTSC:30fps(each ch)
	IP: PAL:25fps(each ch)/NTSC: 30fps(each ch)
	Sub-stream
	Max
	PAL: 704*576:10fps(each ch)
	NTSC: 704*480:10fps(each ch)"
AI	PID - Perimeter Intrusion Detection
	LCD - Line Crossing Detection
	PD&VD - Human&Vehicle Detection"
Event	MD (Sensitivity Level 1~8)
	Video loss
	Beep, Email, Push notification to Mobile APP
Playback function	Fast forward / backward (2x, 4x, 8x, 16x)
	Slow forward (1/2x, 1/4x, 1/8x,1/16x)
Playback	8MP: 60fps (Max 4CH playback)
	5MP: 96fps (Max 8CH playback)
	4MP: 120fps (Max 8CH playback)
	1080P: 240fps (Max 8CH playback)
Local	UI5.0
Web	IE10/11
	Safari V12.1 above
	Firefox V.52 above
	Google chrome V.57 above
	Edge V.79 above
Mobile App	SERAGE
Push notification	Yes
Password reset	Factory Reset Button: Press 10 seconds
BNC	1 (704*576)
VGA	1(1024*768, 1280*720, 1280*1024, 1440*900, 1920*1080)
HDMI	1(1024*768, 1280*720, 1280*1024, 1440*900, 1920*1080
	2560*1440, 3840*2160/EDID)
Ethernet	1 RJ45 100/1000 Base-T
USB	USB 2.0*1 (front)
	USB 3.0*1 + (rear)
Audio	8 in /1 out
HDD	1 SATA HDD, up to 8TB
RS485	1
Alarm Input/out	8 in /1 out
OSD Language	English/French/Spanish/Portuguese/German
	Italian/Greek/Danish/Finnish/Russia/Hebrew/Turkish
	Bulgarian/Arabic/Korean/Japanese/Thai/Hindi
	Romanian/Dutch/Polish
Dimension (WxDxH)	300 X 220 X 53mm
Input Voltage/Current	DC12V/2A
Power consumption	11W
(excluding hard disk)	
Operating Temperature	-10°C~+50°C (14°F ~ 122°F)
Humidity	Less than 90%RH