ESP Intelligent


Your Safety, Our Technology

CHQ-MRC2/FS(SCI)

Fail Safe Analogue Mains Relay Controller

Features

- Loop Powered with Single Loop Address
- Provides single mains rated relay contact
- Provides fail safe relay control (check for control panel compatibility for fail safe operability)
- Provides Relay Contact Rated at 250 VAC @ 5 A (resistive) & 48 VDC @ 2 A (resistive)
- Provides Auxiliary monitored input
- Also available as DIN
- Both models feature an integral SCI
- Deeper, glanded IP65 backbox available
- Can be used with CHQ-BACKBOX to comply with BS 7671.

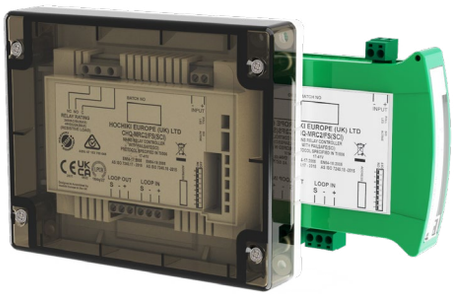

Description

Model CHQ-MRC2/FS(SCI) is a Single Input/Output Module, which provides a single, mains-rated relay output for the control of such devices as dampers, access control equipment (e.g. door magnets), extractors or plant and equipment shutdown. The monitored input can be used for local power supply fault monitoring or as a general-purpose input.

The unit is also available as a DIN Rail mountable version; with an integral short-circuit isolator. The CHQ-MRC2/FS(SCI) utilises simple DIL switches for reliable addressing.

Note: The state of the relay contacts will be indeterminate until the unit is powered.

Specification

Ordering code	CHQ-MRC2/FS(SCI) - Module		CHQ-MRC2/FSDIN(SCI) - DIN Module
Operating voltage	17 – 41 VDC		
Low power mode (0.75s)	100 µA		
Quiescent current (typ)	300 µA		
Current consumption	22 mA ± 20 % (polling)		
Current in short circuit	8 mA		
Maximum short circuit current	1 A		
Relay contact rating* *	48 VDC max, 2 A (resistive load), 250 VAC max, 5 A (resistive load) – For mains ac switching, the Control Panel must be compliant with Low Voltage Directive for SELV circuits.		
Input EOL resistor	10 kΩ, ±5%, 0.25 W		
Input threshold level	ON=470 Ω, Short cct <50 Ω, Open cct >100 KΩ		
Storage / Operating temperature range	-30 °C to +60 °C / -10 °C to +50 °C		
Maximum humidity	95% RH non-condensing (at 40 °C)		
Weight (g) Dimensions (mm)	Module	360 (add 235 to module weight when using CHQBACKBOX)	L157 x H127 x H35 (Module plus Lid) H79 (CHQModule plus Lid plus CHQ,BACKBOX)
	DIN Module	145	L119 x H108 x D24
Colour / Material	CHQ Module & CHQ-BACKBOX White ABS, DIN Module Green ABS, Module Lid Semi-Opaque Black ABS as standard (white version – CHQ-LID(WHT) also available)		

*** Fire alarm control panel compatibility required for these products.**
**** No fuses are fitted on this device. The relay output circuit must therefore be protected by a suitable over-current protection device to prevent excessive current through the relay contacts. Refer to the relay contact specification in this document.**

For further information visit our website.

Hochiki reserves the right to alter the specification of its products from time to time without notice. Although every effort has been made to ensure the accuracy of the information contained in this document it is not warranted or represented by Hochiki to be a complete and up-to-date description. Check online for current version.

HOCHIKI ISS4 AUG26