

Security Trade Products





- IP66 Ingress protection
- Impact rating 20J
- Momentary contact
- RoHS Compliant
- M16/20 pre-moulded conduit knockouts

STP-0657R-YB-PCA


Overview

The STP-0657R-YB-PCA is just one of the variants in the range of high impact, externally rated surface mount buttons. The robust two part cross polymer housing incorporates an integral gasket that seals the unit to IP66, coupled with the original red dome, makes the unit an effective and reliable solution for external egress and other outdoor switching applications.

The housings are available in two colour combinations – grey lid with a black base and black base with a highly contrasting yellow lid. Both models are easily identifiable to the user. The base incorporates pre-moulded conduit knockouts (both M16 and M20), these aid installation by ensuring effective cable management.

Legend discs are manufactured from an externally rated bi-colour engraving laminate which is available in a variety of colour combinations. The discs are gasketed using an open cellular foam, when the switch is tightened to the unit, the cells close to maintain the IP rating. Custom legend discs are available to special order to suit particular applications – please call to discuss your requirements.

Dimensions (mm):

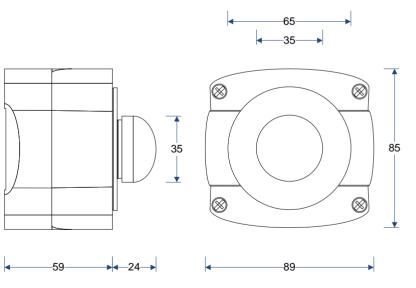

| Technical (switch) | |
|--------------------------|--------------------------------------|
| Current rating | 2A max resistive at 12/24Vdc |
| Insulation resistance | 1GΩ |
| Life (electrical) | 100,000 cycles 20° / 50,000 @ 70° |
| Contact resistance | 25mΩ |
| Ingress protection | IP67 |
| Impact rating | 20J |
| Shock | 50g |
| Operating temp. °C | -40°C to +125°C |
| Body / actuator material | Zinc alloy |
| Contact / terminal | Fine silver / tin plate nickel |
| Travel | 2.5mm |
| Life (mechanical) | 2 x 10 ⁶ cycles (nominal) |
| Operating force | 7N |
| Contact bounce | 5ms |
| Circuit form (Form Z) | NC O NC |

Technical (housing)

| Ingress protection | IP66 |
|--------------------|-------------------------|
| Material | PC + PBT cross polymer |
| Approvals | UL listed, CSA approved |

Ordering information: