Responder 24 Electromagnetic Closer



Product Overview

The Rutland Responder 24, Electromagnetic Door Closer has been designed with universal handing and ease of fitting with the hygienic plug and go wiring.

- ✓ Size EN4 which can be Hold Open or Swing Free and fitting on either left or right hand doors has made them easy to specify and order.
- ✓ The one box and one code make the unit very manageable for the fitter, buyer, merchant stockist or specifier.
- ✓ Fire and endurance tested to meet and exceed the European standards that will leave your doors closed in a fire and emergency situation.
- ✓ The Electromagnet is activated by the Fire alarm system or over ridden on the switch if required making it very versatile and easy to use.
- ✓ These closers are tested to 60minutes in successful EN 1634 fire tests.





Specification Overview



Fire Tested to



Universal Application



Max Door Weight 80kg



Power Size EN4



Opening Angle 180°



Adjustable Latch Speed



Max Door Width 1050mm



Guarantee



Adjustable Closing Speed




1942-CPR-44-0111-18-01





24V Direct Current

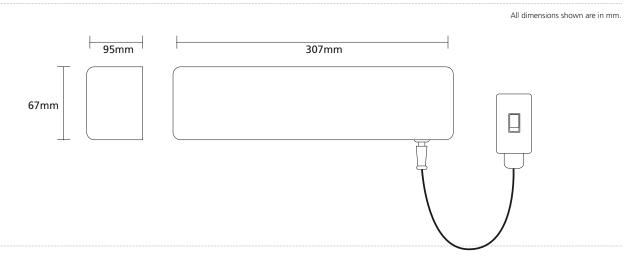

Technical Information

Volts: 24VDC Amp: 84ma Draw Watts: 2W

The current 2A 24VDC Power Supply Unit (PSU) we stock has 4 outputs.

BS EN 1155 Classification

Responder 24 door closers have been independently tested to conform with the BS EN 1155 performance standard. They are CE marked and classified as follows:

BS EN 1634 Fire Test

Responder 24 door closers have been tested up to 60 minute door sets. Test certificates are available on request.

Options

- Finishes available: Silver, Satin Nickel, Polished Nickel, Polished Brass and Antique Brass
- Power supply unit is available on request