

Staff Pass Kits

EXF2S/BK, EXF2S/DK, EXF2S/MK

The 'Floor to Store' door alarm kit provides an alarm for doors where staff need to frequently pass through. Ideal where the door cannot be locked but needs to be alarmed. e.g. a store room door which is on a public fire exit route or a retail shop floor needing access to a stock room.

How it works

- Staff simply enter a 4 digit passcode to temporarily isolate the alarm system.
- This grants a 10 second window to open the door. An additional time period is provided to pass through and close the door.
- Pressing the 'Press to Exit' button on the secure side allows staff to re-enter without triggering the alarm.
- When door is in armed state if it is opened without entering the correct pass code or pressing the 'Press to Exit' button the alarm will activate.


The door alarm kit utilises the 'Staff Pass' feature found in our standard keypad Exitguard door alarm and is available in battery, 12vdc, and mains powered versions. It comes complete with a 'Press to Exit' button.

Benefits and Features

- Keypad control
- 108db sounder
- Six selectable alarm tones to suit your environment
- Front and back acting tamper switch
- Manager code restricting users from changing various features
- User pass / reset code
- Bleep in off option reminds users that Kit is switched off
- Alarm strobe for visual alarm indication
- Alarm relay outputs on EXF2S/DK and EXF2S/MK
- Battery condition monitor on EXF2S/BK
- On/off monitor relay on EXF2S/DK
- Output for Multiguard connection
- Robust ABS enclosure
- UKCA and CE marked, ROHS compliant
- Manufactured in the UK



Dimensions (mm)

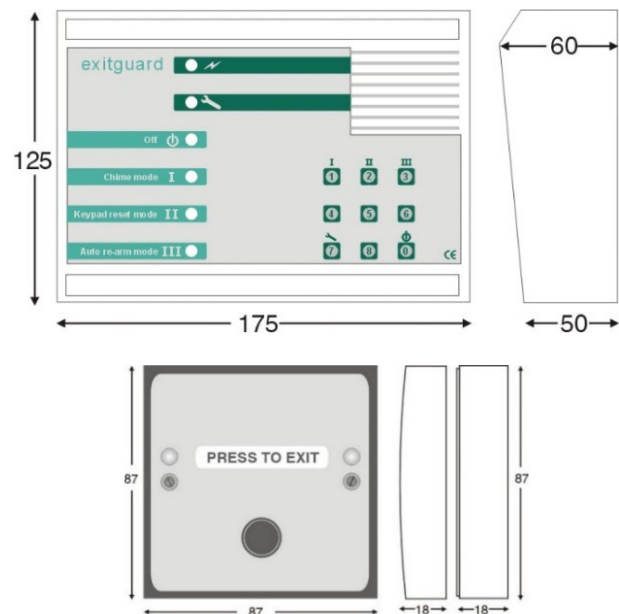

Staff Pass Door Alarm Kit model comparison

Specification	EXF2S/BK	EXF2S/DK	EXF2S/MK
Battery Monitor	Yes	No	Yes
On/Off Monitoring Relay	No	SPCO 1A 30vdc	No
Supply Voltage	Battery or 7v -14vdc	12vdc -14vdc	220/240vac
Supply Current	35mA quiescent 80mA max	45mA quiescent 155mA max	< 0.5A
Batteries(supplied)	6 x AA alkaline	No	6 x AA alkaline
108db Sounder	Yes	Yes	Yes
Alarm Relay Contacts	No	SPCO 1A 30vdc	SPCO 1A 30vdc
Auxiliary Power O/P	No	No	200mA @12vdc