

SERAGE

QUALITY RELIABILITY VISION




2MP CUBE CAMERA




SRCN2F

Image Sensor	1/2.8" 2Megapixel progressive CMOS
Effective Pixels	1920(H) x 1080(V)
Minimum Illumination	Color 0.006lux @ F1.6(AGC ON) ; B/W 0 lux @ IR ON
IR Distance	up to 10m
IR On/Off Control	Auto/ Disable/Enable
IR LED	12
Warning Light	1
Focal Length	2.8mm
Max. Aperture	F No. 2.0±10%
Angle of View	H: 92.7° V:48.5° D:115.2°
Focus Control	Fixed
Close Focus Distance	0.2m
Compression	H.264/H.265
Streaming Capability	Tripel Streams
Resolution	Mainstream: 1080P(1920×1080)/1.3M (1280×960)/720P(1280×720) Substream: 720P(1280×720),VGA(640×480), QVGA(320×240) Mobilestream: QVGA (320×240)
Frame Rate	50Hz: 25fps@2MP/960P/720P 60Hz: 30fps@2MP/960P/720P
Bit Rate	H264/H265:8K ~ 8Mbps
Day/Night	Auto(ICR) / Color / B/W
Wide Dynamic Range	WDR
BLC Mode	BLC
White Balance	Auto/Manual
Noise Reduction	3D DNR
Motion Detection	Off / On
Smart IR	Support
Mirror	Off / On
Compression	G.711A/U
Ethernet	RJ-45 (10/100Base)
Wi-Fi	2.4GHz, 10m
Protocol	TCP/IP,HTTP,DHCP,DNS,DDNS,RTP/RTSP, SMTP,NTP,UPnP,HTTPS
Streaming Method	Unicast/Multicast
Max. User Access	7 Users
Edge Storage	Micro SD Card (up to 256GB)
Web Viewer	Yes
Smart Phone	iOS, Android
Audio Interface	Built-in Mic & Speaker
Alarm	1/1,PIR
Power Supply	DC12V/POE
Power Consumption	MAX ≤ 4.5W
Operating Conditions	-10°C ~ +45°C (14°F ~ +113°F) / Less than 95% RH
Storage Conditions	-10°C ~ +45°C (14°F ~ +113°F) / Less than 95% RH
Dimensions	63*120*33mm

KEY FEATURES

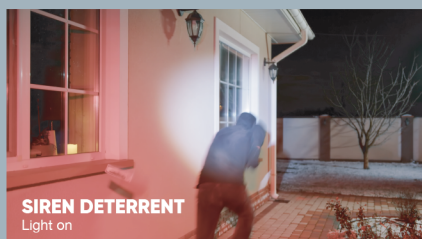

SIREN DETERRENT
Light on

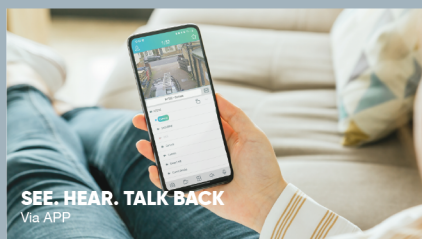

SEE. HEAR. TALK BACK
Via APP

WHERE

Suitable for homes and business for internal detection and deterrent

WHEN

The SRCN2F is top-of-the-line for internal security. If any motion is detected, it will immediately activate a loud siren, flashing lights, and send a notification to your phone. You can even use the app to listen in and talk back in case of intruders.



Scan to watch the Night Colour
product & features demo video