


# SERAGE

NEXT-GEN AI CCTV

# SR9032NP/4






## 32 CHANNEL NVR PoE

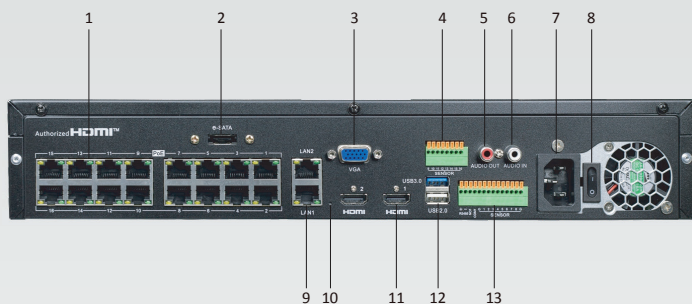

No.	Description	No.	Description
1	PoE Port	8	Power Switch
2	e-SATA	9	Lan Port
3	VGA	10	Reset Button
4	Sensor, Alarm & Rs485	11	HDMI
5	Audio Out	12	USB
6	Audio In	13	Sensor, Alarm & Rs485
7	Power		

## FEATURES:



NDA (National Defense Authorization Act) compliant, refers to products that are "safe to use" by government agencies and enterprises.

<b>Supported Resolutions</b>	12MP / 8MP / 5MP / 4MP / 3MP / 1080p / 720p
<b>Inputs Bandwidth</b>	320 Mbps
<b>Outputs Bandwidth</b>	320 Mbps
<b>Audio Compression</b>	G.711A;G.711U
<b>Video Compression</b>	H.264 / H.264+ / H.265 / H.265+
<b>Frame rate</b>	12MP:30fps 8MP:120fps 4MP:240fps 2MP:480fps 1080P:480fps
<b>AI</b>	Yes
<b>Event</b>	MD(Sensitivity Level 1~8) Video loss Beep, Email, Push notification to Mobile APP
<b>Playback function</b>	Fast forward / backward (2x, 4x, 8x,16x) Slow forward (1/2x, 1/4x, 1/8x,1/16x)
<b>Fisheye</b>	
<b>Local Web</b>	Use WEB CMS,device does not support UI5.0 IE10/11 Safari V12.1 above Firefox V.52 above Google chrome V.57 above Edge V.79 above
<b>Mobile Application</b>	Serage AI
<b>Push Notification</b>	Yes
<b>P/W Reset</b>	Factory Reset : Press 10 seconds
<b>VGA</b>	1(1024*768, 1280*720, 1280*1024, 1440*900, 1920*1080 )
<b>HDMI 1</b>	1(1024*768, 1280*720, 1280*1024, 1440*900, 1920*1080, 3840*2160/EDID)
<b>HDMI 2</b>	1(1024*768, 1280*720, 1280*1024, 1440*900,1920*1080) Async output
<b>PoE Ports</b>	16*RJ45, 802.3at/af
<b>Ethernet Ports</b>	2 RJ45 100/1000 Base-T
<b>USB Ports</b>	USB2.0*1(front), USB3.0*1+USB2.0*1(rear)
<b>Audio out</b>	1
<b>E-sata</b>	1
<b>HDD Bays</b>	4 SATA , each HDD up to 12TB
<b>Line in</b>	1
<b>RS485</b>	1
<b>Alarm Input/out</b>	16 in /1 out
<b>OSD Language</b>	English/French/Spanish/Portuguese German/Italian/Greek/Danish/Finnish Russia/Hebrew/Turkish/Bulgarian/Arabic Korean/Japanese/ Thai/Hindi/Romanian Dutch/Polish
<b>Dimension (WxDxH)</b>	378*326*66mm
<b>Input Voltage/Current</b>	ATX280W
<b>Power consumption (excluding hard disk)</b>	12W
<b>Operating Temperature</b>	Temperature: -10°C~+50°C (14°F ~ 122°F)
<b>Humidity</b>	Humidity: Less than 90%RH