

ALPINE SLIM



Triple Test Emergency Exit Sign
Selectable Self Test, Remote Control or Manual
Test- 'At the flick of a switch'



from Channel Safety Systems

Emergency Exit Sign

The Alpine Slim utilises LED technology for low cost, high output, emergency illumination.

Features

- 'Tri-Test' - Selectable manual, remote control or self test options
- Self-test operation to BS EN 62034
- Maintained or Non-maintained 3 hour emergency back-up
- 5 downward pointing LEDs to illuminate exit door.
- Low environmental impact
- Minimal maintenance
- Meets BS EN 60598-2-22 and other relevant standards
- Lightweight & easy to install
- Low environmental impact
- Minimal maintenance
- Supplied with full legend set
- LiFePo4 Lithium Battery



Optional Remote Control



- Press once for 5 second monthly test
- Press twice for 3 hour yearly test
- LED confirms pass/fail status
- No need to remove/restore power



www.channelsafety.co.uk

Tel: 0845 884 7000

Email: customerservices@deta.co.uk

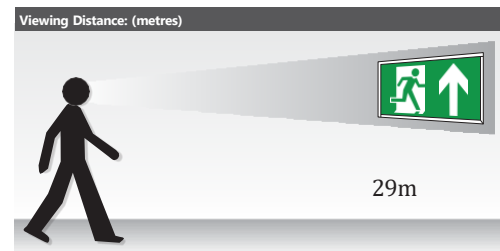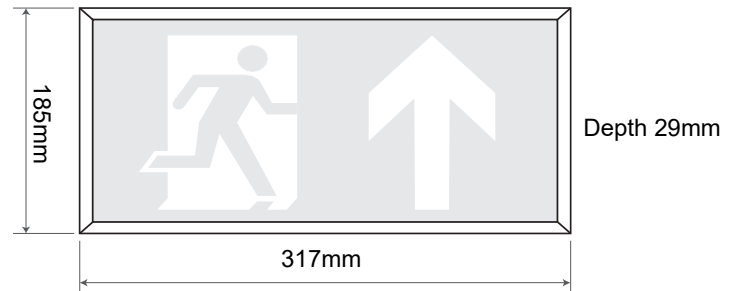

Note: Image not to scale and for pictorial reference only

SPECIFICATIONS

Light Source	SMT LED 4W
IP Rating	IP50
Emergency Duration	3 hours (minimum)
Mains Voltage	230V 50Hz ± 10%
Mains Current	(max) 150mA (max) 35mA quiescent (3W)
Recharge Period	Less than 24 hour
Charge Indicator	Integral green LED & red fault LED
Changeover Voltage	As per the requirements of BS EN 60598-2-22
Temperature Range	5°C to 40°C
Weight	650gm
Battery	LiFePO4 3.2V 1500mAh
Material & Finish	Polycarbonate construction, white finish

PRODUCT CODE

EALSL1

E/EM/RC

DESCRIPTION

Alpine Slim LED exit sign c/w full legend set

Remote control test unit (Optional)

Errors and omissions excepted. Specification is subject to change without notice.